

XELLAR-CUT CUTTING MODULE

XELLAR	Unit	200	300	400
Strip thickness up to ¹	mm	1	1.5	3.5
Line speed max. ²	m/min	60	60	60
High-dynamic servo drives		yes	yes	yes
Integrated conveyor belt		yes	yes	yes
Craneable		yes	yes	yes

Features

Lighting (LED)		optional	optional	optional
----------------	--	----------	----------	----------

Separating systems

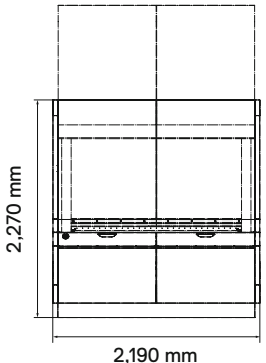
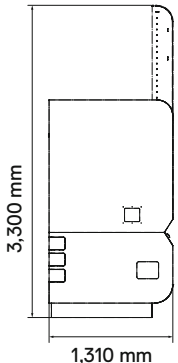

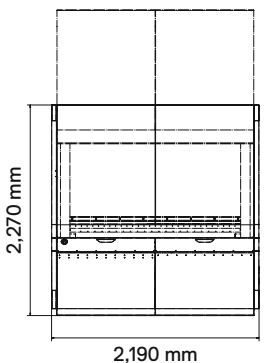
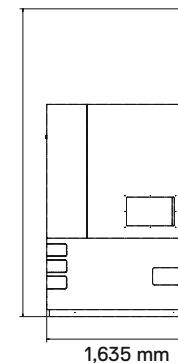

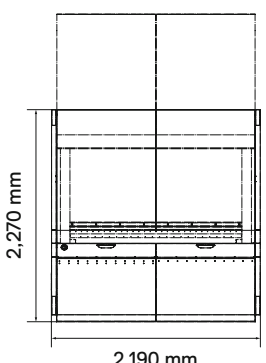
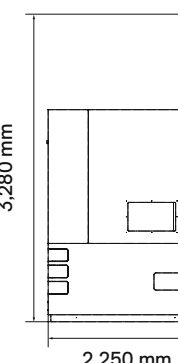

Punching		optional	optional	optional
Shearing		optional	optional	optional
Sawing		optional	optional	optional
Weight (empty)	kg	approx. 1,800	approx. 2,200	approx. 3,200

¹ with Rm up to 300 N / mm²

² depending on the profile geometry, punching patterns



DIMENSIONS

Model	Front view	Side view	Top view
XELLAR-CUT 200	 <p>2,270 mm 2,190 mm</p>	 <p>3,300 mm 1,310 mm</p>	 <p>1,310 mm 2,190 mm</p>
XELLAR-CUT 300	 <p>2,270 mm 2,190 mm</p>	 <p>1,635 mm 1,635 mm</p>	 <p>1,635 mm 2,190 mm</p>
XELLAR-CUT 400	 <p>2,270 mm 2,190 mm</p>	 <p>3,280 mm 2,250 mm</p>	 <p>2,250 mm 2,190 mm</p>